

ROTARY ENGINEERING ASIA LIMITED

6 ton 2 post lift



Simple controls

High quality arm locks machined from billet steel

Extra large arm design with large diameter lift pad

Supplied with 100mm 4WD extensions. 187mm available on request.



ROTARY ENGINEERING ASIA LIMITED


- 4.5 metre top beam ensures even vans can be lifted to maximum lift height.
- Supplied with low profile telescopic lift pads to access lowered vehicles PLUS 4WD adapters (90mm to 240mm range).
- Low profile arm design with recessed locking bolts.
- Full manual control. The hoist does not go up before it comes down.
- Complies with Australian Standards.
- Twin ram, twin cable, twin safety lock design.
- Fan forced motor coupled with cooling fins keeps the motor at operating temperatures even in hot Aussie summers.
- The hoist is suppled with a thermal cut out wired into the motor (normally an option on other hoists).

Built in voltage transformer works the switches and controls so there is no need to run new electrical wires

through your building when replacing older hoists.

- High quality hydraulic rams with locally available seals.
- Single hose runs to the slave side post ensuring there is no possibility of oil leaks onto cars.
- Hydraulic parachute valve protection ensure the hoist descends at a slow controlled pace in case of a hydraulic hose failure.
- Asymmetric design means car doors open further, coupled with a large internal carriage means no greasy poles.
- High quality long life carriage slides made from self lubricating polymers.
- Metal reservoir tank.

Lifting capacity	6000 KG
Lifting height	2015 mm
Lifting time	50 ~ 60 Seconds
Minimum height	121 mm
Motor voltage	3 PH 2.2 KW 4P 400 V 50/60 Hz

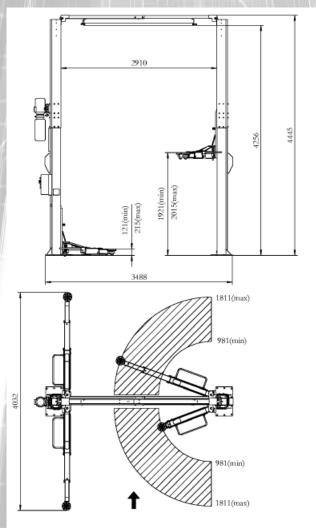



Sydney 0296717811

Melbourne 0393303100

Brisbane 0404198699

18000equip (1800037847)

www.interequip.com.au