


## Super Automatic fino a 26". Super Automatic to 26".

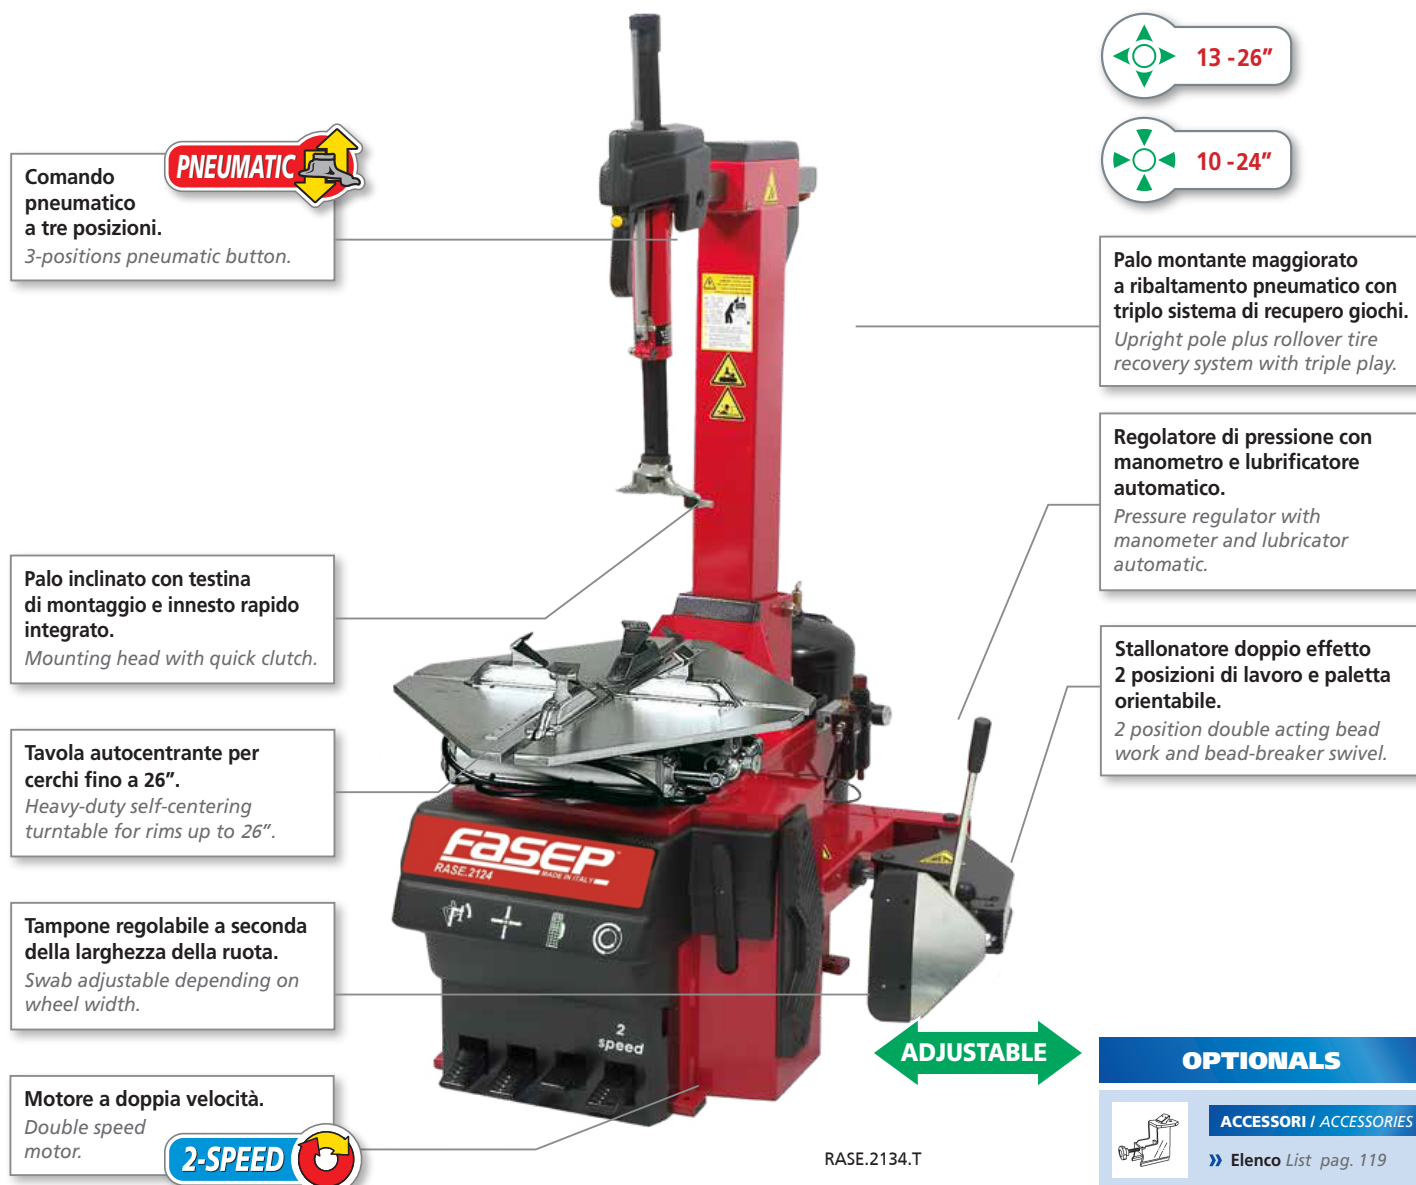

RASE.2134 è uno smontagomme super automatico, per ruote con pneumatici maggiorati e ribassati, progettato per gli specialisti del pneumatico. Adatto per ruote di autovettura e motociclo con cerchi da 10" a 24". Una eccezionale robustezza e completezza grazie agli accessori che permettono di lavorare su ruote a profilo ribassato.

RASE.2134 is a super automatic tire changer for passenger car and motorcycle wheels with rims up to 24" with adjustable wheel clamps. It combines reliability and solidity outperforming all competition. A full set of accessories allows to operate on low profile tires with absolute ease.

### CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

|                                                                                         |                                |
|-----------------------------------------------------------------------------------------|--------------------------------|
| • Alimentazione elettrica / Power source                                                | 400V 50-60 Hz 3Ph              |
| • Potenza motore / Motor power                                                          | 0,75 Hp 0,55 Kw                |
| • Alimentazione richiesta / Power requirement                                           | 1000 Watt                      |
| • Velocità di rotazione / Rotation speed                                                | 8-15 RPM                       |
| • Diametro cerchio bloccaggio esterno / Rim diameter external clamping                  | 10"-24"                        |
| • Diametro cerchio bloccaggio interno / Rim diameter internal clamping                  | 13"-26"                        |
| • Diametro Ruota max. / Wheel diameter                                                  | 42" (1060 mm)                  |
| • Larghezza Ruota max / Rim width                                                       | 14" (370 mm)                   |
| • Forza cilindro (10 bar) / Bead breaker force                                          | 2900 Kg                        |
| • Stallatore / Bead breaker type                                                        | doppio effetto / double effect |
| • Pressione d'esercizio / Operating pressure                                            | 8-10 bar (145 psi)             |
| • Coppia mandrino max / Torque                                                          | 110 kgm                        |
| • Limitatore di pressione entrata max / Intake pressure limiting device max.            | 10 bar (145 psi)               |
| • Limitatore di pressione gonfiaggio max / Inflating pressure limiting device max.      | 3,5 bar (50 psi)               |
| • Valvola di sicurezza sul dispositivo di gonfiaggio / Safety valve on inflating device | 4 bar (60 psi)                 |
| • Livello rumore / Noise                                                                | < 70 dB (A)                    |

**Automatic tyre changer** conceived for **industry professionals** and suitable to handle **car van & 4WD wheels** having rims from **10" to 26"**.

The 2134 Tyre changer includes many patented technical solutions that make this a great choice for high volume tyre stores. Low turntable height for ease of use, double acting bead breaker cylinder for extra strength, solid Italian steel for high robustness and reliability.

Supplied with a the SA087 Right Hand Side assist arm as standard makes the changing of low profile & run flat tyres a breeze.

A full set of plastic protectors are included with the machine for delicate rims.



### 1 MOUNTING HEAD QUICK CHANGE DEVICE


Fasep patented system integrated inside the hexagonal vertical arm which allows changing mounting heads in seconds without reducing the original machine working capacity.



### 2 WORKING ARM

The working arm is pneumatically controlled through an on-purpose **cylinder** to achieve a better level of safety and accuracy.

The vertical post is also equipped with conic bushes and regulation systems for easy maintenance activities.

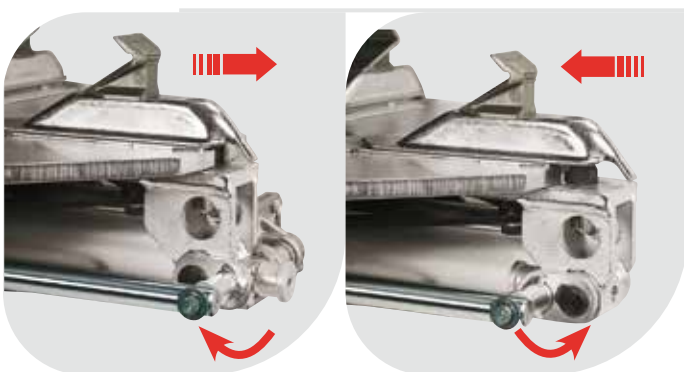

### 3 SELF-CENTERING TURNTABLE

The Fasep 2134 has a **new-concept turntable** with mechanism designed to assure high performance over time.

In spite of the breadth of its working range (10"-26"), the turntable is compact and has **2 working positions**: the first from 10" to 24", the second from 13" to 26".

### 4 BEAD BREAKING SYSTEM

Bead breaker arm equipped with high efficiency double acting cylinder and with a **patented system** which allows exactly the **right position no matter the wheel diameter or width**, thus improving the accuracy of bead breaking operations.

Also the wheel support is adjustable in **2 different positions**.



### 5 UNIVERSAL PNEUMATIC DEVICE PRESS Pro (OPTIONAL)

Universal auxiliary device Press Pro which assists the operator to easily mount and demount particularly tough or low profile tyres such as «Run-Flat».

This **patented system** allows to handle the second tyre bead without using the lever, thus avoiding any risk of rim damaging. Other right side help arms (SA087 or SA078) are also **available on demand**.